


# CleanaWater®



## Oil Water Separators

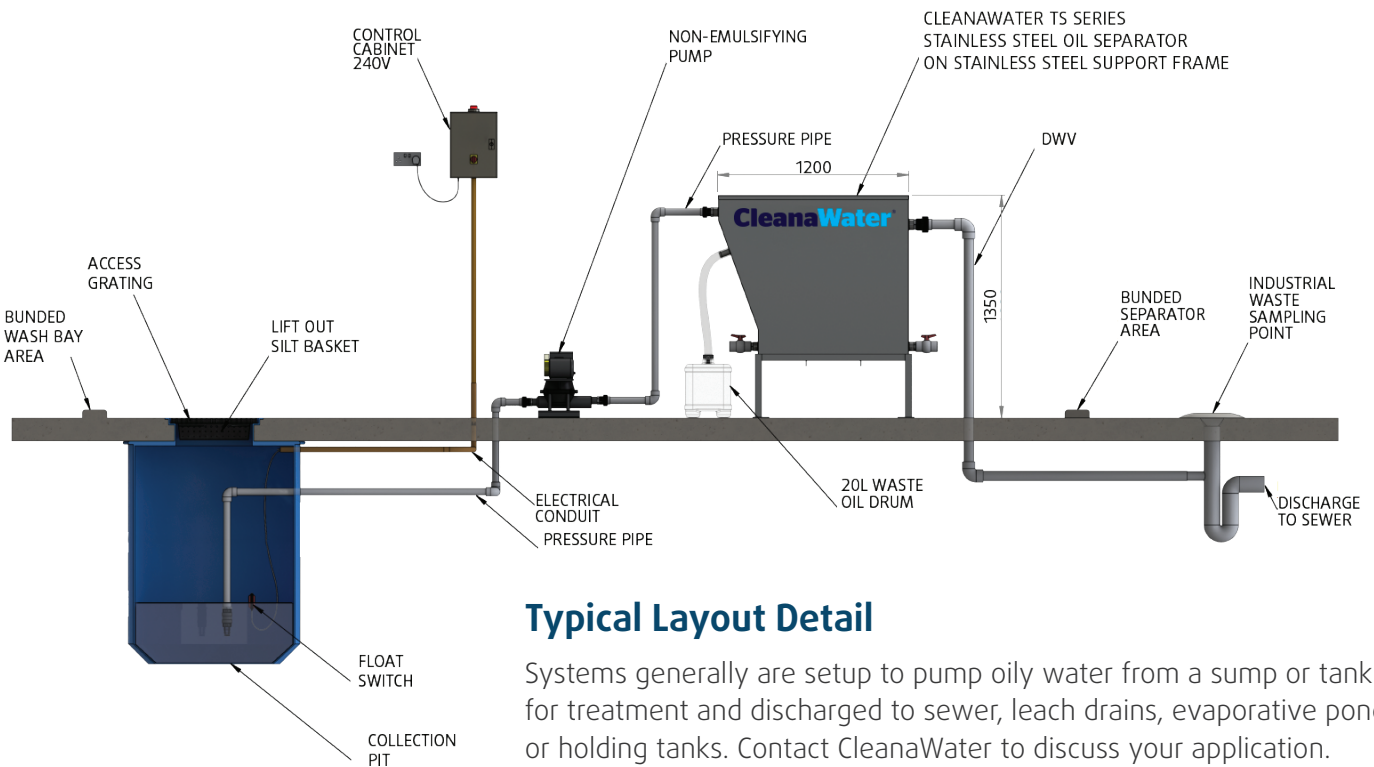

Discuss your **Oil Water Separator** requirements with your plumbing equipment supplier or visit [cleanawater.com.au](http://cleanawater.com.au) for more information



STAINLESS STEEL




POLYETHYLENE

## Features & Benefits of CleanaWater Coalescing Oil Separators

- ◆ Complete Packages including Non Emulsifying Pumps, Float Switches and Controllers
- ◆ Large Range from 1,000 to 5,000 litres per hour
- ◆ Available in stainless steel and polyethylene to suit all budgets
- ◆ Automated operation
- ◆ WSAA Appraised (Appraisal No TWA1114)
- ◆ Approved and appraised by major water and regulatory authorities
- ◆ Range includes systems to suit all budgets
- ◆ Easy and quick to install
- ◆ Minimal maintenance required
- ◆ Compact systems ideal for outdoor installations

MODEL	DIMENSIONS	NOMINAL FLOW RATE (L/hr)	OIL SEPARATOR CONSTRUCTION
TS5000 SS	1200mm L X 730mm W X 990mm H	5000	Stainless Steel
TS4000 SS	1200mm L X 730mm W X 990mm H	4000	Stainless Steel
TS3000 SS	1200mm L X 730mm W X 990mm H	3000	Stainless Steel
TS2500 SS	1200mm L X 370mm W X 990mm H	2500	Stainless Steel
TS2000 SS	1200mm L X 370mm W X 990mm H	2000	Stainless Steel
TS1500 SS	1200mm L X 370mm W X 990mm H	1500	Stainless Steel
TS1000 SS	1200mm L X 370mm W X 990mm H	1000	Stainless Steel
TS2500 PE	1349mm L X 360mm W X 980mm H	2500	Polyethylene
TS2000 PE	1349mm L X 360mm W X 980mm H	2000	Polyethylene
TS1500 PE	1349mm L X 360mm W X 980mm H	1500	Polyethylene
TS1000 PE	1349mm L X 360mm W X 980mm H	1000	Polyethylene

Your local store is:

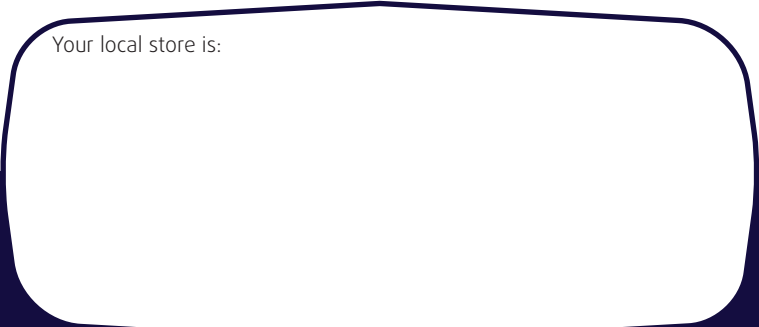

Discuss your **Oil Water Separator** requirements with your supplier or visit [cleanawater.com.au](http://cleanawater.com.au) for more information